
NEO6-STR

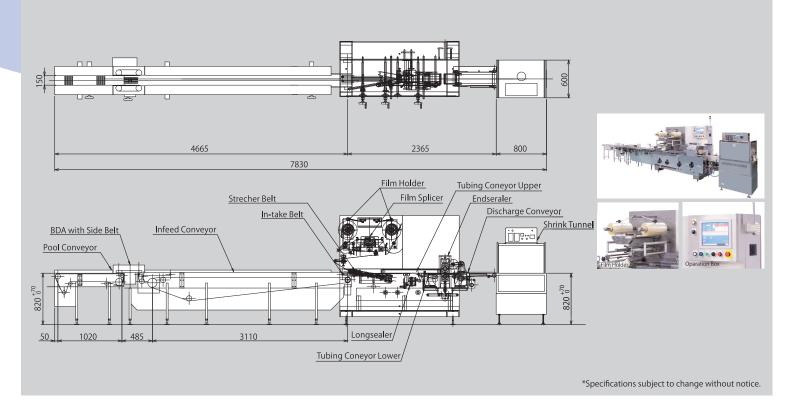

[NEO6-STR Feature]

- The NEO6- STR Stretch Pillow Shrink Wrapper uses stainless steel and aluminum made main body frame for the production line requires water washing.
- Roller Pool Conveyor and Autfeeder that separate products one by one fed into wrapping machine.
- ■Independent Endsealer motion controller gives easy and safety set up and also easy machine operation.

[NEO6-STR SPEC]

Example product to be wrapped	Frozen noodle and other frozen food.
Wrapping speed	max120packs/min
Power consumption	3phase, 200v, 12.0kw (Additional power for shrink tunnel is required)

The best strech wrapper for Forzen Product

[Optional Items]

■Belt Divided Autofeeder

Star Wheel Autofeeder, Timing Screw Divider.

■Automatic Film Splicer

When detects the end of film activates splice to next film roll. Splice by heat seal. Splice by double faced adhesive tape.

■Flex Length Conveyor

Smooth product transfer from tubing conveyor to discharge conveyor realized. Two conveyor's edge contacts when product transfer with less vibration. Suitable for multi package and small product.



Tokiwa Kogyo Co., Itd.

Head office and main factory 2-190-9 Yamada Nishi-ku Sakai-shi Osaka 593-8316

Japan

Phone +81-72-273-1234

Branch and factory 2-2-18 Shiratori,

2-2-18 Shiratori, Katsushika-ku, Tokyo Phone +81-3-3603-3271

http://www.tokiwrap.co.jp/

Sales Office Kyushu: Hakata-eki Higashiguchi Bldg. 7th floor, 1-11-15 Hakata-eki Higashi, Hakata-ku, Fukuoka-shi Phone +81-92-451-1428